
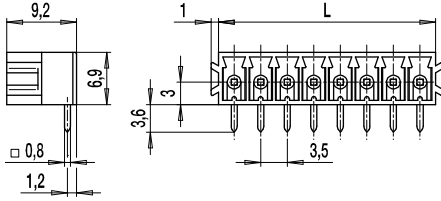


Pin strip 110-M-211

Plug-in direction parallel to PCB, with false insertion prevention



Pin strips of series 110 offer remarkable connection data (1,5 mm² / 160 V-III-3 / 8 A) for their small dimensions. In combination with the corresponding plug connectors they guarantee reliable wire connection for all wire types. The compact housings with a pitch of 3,5 mm are available with 2 to 24 poles. The plug direction of the 110-M-211 is parallel to the PC board. The pin strips feature slots to accommodate the coding elements 120-K. Laterally attached dovetail expansions reliably prevent incorrect plugging.

Part Numbers

No. of poles	110-M-211	Length	Pcs
2	10.841.002	7,60	200
3	10.841.003	11,10	200
4	10.841.004	14,60	100
5	10.841.005	18,10	100
6	10.841.006	21,60	100
7	10.841.007	25,10	50
8	10.841.008	28,60	50
9	10.841.009	32,10	50
10	10.841.010	35,60	50
11	10.841.011	39,10	50
12	10.841.012	42,60	50
13	10.841.013	46,10	50
14	10.841.014	49,60	50
15	10.841.015	53,10	50
16	10.841.016	56,60	50
17	10.841.017	60,10	50
18	10.841.018	63,60	50
19	10.841.019	67,10	50
20	10.841.020	70,60	50
21	10.841.021	74,10	50
22	10.841.022	77,60	50
23	10.841.023	81,10	50
24	10.841.024	84,60	50

General Information

Pitch	3,5 mm
No. of poles	2 - 24
Usable with	all plug connectors of series 110
Additional Information	For versions with connecting flanges see 110-M-215.

Technical Data

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	160 V	160 V	320 V
Rated Impulse Voltage	2,5 kV	2,5 kV	2,5 kV
Rated Insulation Voltage	130 V acc. to EN 60998-1		
Rated Current	8 A		
Hole in PCB	ø 1,3 mm		

Material

Moulding	PA, grey, V-0
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Solder pin	0,8 x 0,8 mm; tin plated brass

Approvals

	Current	Voltage	Group	AWG	Nm
	8	300	B, D		
	8	300	B		

Options / Accessories

- Consecutive numbering
- Special marking according to drawing
- Self-adhesive marking strip BST-3,50
- Pitch of 7 mm for larger clearance and creepage distances
- Coding elements 120-K
- With smooth side wall