
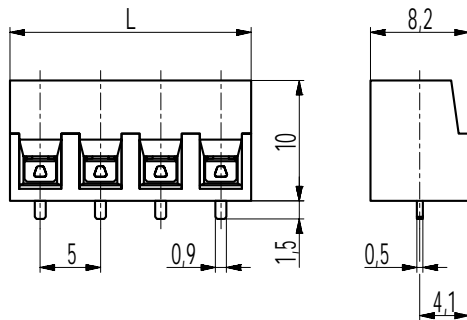



# 140-A-111-THR

PCB connector for THR

Screw connection, short solder pins



## Recommended PCB Layout



L1 = (No. of poles - 1) x pitch  
Solder pad diameter:  $\varnothing$  2,2 mm  
Solder paste thickness: 0,15 - 0,2 mm

The PCB connector 140-A-111-THR with a pitch of 5 mm, designed for the soldering process in Through-Hole-Reflow technology, is available in 2- to 12-pole design.

The very short 1.5 mm solder pins, no longer protruding from the PC board, allow for double-sided mounting possibilities.

The terminal housing is made of heat-resistant material.

The wire entrance is parallel to the PCB.

The screws are captive.

## Part Numbers

No. of poles	140-A-111-THR	Length	PU
2	10.801.562	10,00	250
3	10.801.563	15,00	250
4	10.801.564	20,00	200
5	10.801.565	25,00	100
6	10.801.566	30,00	100

further number of poles on request

## General Information

Pitch 5 mm

No. of poles 2 - 12

## Technical Data

Clamping Range *solid / flexible / AWG*  
0,14 - 2,5 mm<sup>2</sup> / 0,14 - 1,5 mm<sup>2</sup> / 26 - 16 AWG

Rated Cross Section 1,5 mm<sup>2</sup>

Wire Stripping Length 6 mm  $\pm$  0,5 mm

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	200 V	320 V	500 V
Rated Impulse Voltage	4 kV	4 kV	4 kV

Rated Insulation Voltage 250 V accord. to EN 60998-1

Rated Current 16 A

Soldering process Reflow solder

Hole in PCB  $\varnothing$  1,3 mm

PCB thickness 1,6 mm

Torque 0,5 Nm

## Material

Moulding PA HT, black, V-0

Comparative Tracking Index CTI  $\geq$  600

Insulating Group I

Temperature Range -40°C up to 120°C; reflow solder temperature peak max. 255°C acc. to DIN EN 61760-1

Terminal body Nickel plated brass

Pressure clamp Tin plated copper alloy

Screw M3; Zinc plated steel, blue passivated

Solder pin 0,9 x 0,5 mm; tin plated copper alloy

## Options / Accessories

- Consecutive numbering
- Special marking according to drawing
- Self-adhesive marking strip BST-5,00 [1]
- Pitch of 10 mm for larger clearance and creepage distances
- Tape-on-Reel on request
- Other solder pin lengths on request

[1] To be fitted after reflow soldering process