


302-NFB(-DS)

Plug-in terminal strip

Screw connection & socket with clamping spring, low profile version

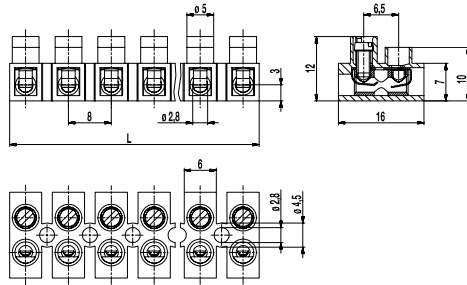

The plug-in connector strip 302-NFB, lower version, is available in 8 mm pitch with 1 to 12 poles.

The "N"-variant only differs from the standard 302-FB version by the 12 mm overall height (i.e. the moulding height is 3 mm lower). Note the shortened clearance and creepage distances.

The wire protector of the "DS"-version reliably prevents damage to multi-wire flexible conductors by the turning screw.

These terminal strips can be screw-mounted on a substrate.

Part Numbers

No. of poles	302-NFB	302-NFB-DS	Length	PU
2	12.820.045	52.820.045	15,00	250
3	13.820.045	53.820.045	23,00	250
4	14.820.045	54.820.045	31,00	200
5	15.820.045	55.820.045	39,00	100
6	16.820.045	56.820.045	47,00	80
7	17.820.045	57.820.045	55,00	80
8	18.820.045	58.820.045	63,00	80
9	19.820.045	59.820.045	71,00	60
10	20.820.045	60.820.045	79,00	50
11	21.820.045	61.820.045	87,00	50
12	22.820.045	62.820.045	94,00	40

General Information

Pitch	8 mm
No. of poles	2 - 12
Usable with	302-NSV(-DS)
Areas of application	This plug connector is well suited for applications that require to easily open and close not energised circuits.



Technical Data

Clamping Range	<i>solid / flexible / AWG</i>		
<i>without wire protector</i>	0,5 - 4 mm ² / 0,5 - 2,5 mm ² / 20 - 12 AWG		
<i>with wire protector</i>	0,34 - 2,5 mm ² / 0,34 - 1,5 mm ² / 22 - 14 AWG		
Rated Cross Section	1,5 mm ²		
Wire Stripping Length	5 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	160 V (40V)	160 V (100V)	320 V (160V)
Rated Impulse Voltage	2,5 kV (1,5kV)	2,5 kV (1,5kV)	2,5 kV (1,5kV)
Rated Insulation Voltage	250 V acc. to EN 60998-1		
Rated Current	6 A		
Torque	0,4 Nm		
Other specifications	Rated values apply to use in combination with 302-NSV(-DS). Values in parentheses apply to use without insulated substrates.		

Material

Moulding	PA, natural, V-2
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Terminal Body	Nickel plated brass
Screw	M2,6; zinc plated steel, blue passivated
Wire protector	Tin plated tin bronze
Spring	Stainless steel strip

Approvals

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	10	300	B,D	22 - 14	0,4 [2]
	6	300	B,D,E	26 - 12	0,4 [1] [2]

[1] for 302-NFB-DS: 26 - 14 AWG

[2] When mounted on a suitable insulated surface, on standoffs or equivalent means.

Options / Accessories

- Marking options on the screw guides
- Jumper 302-J