


Socket terminal strip

302-N(-HDS)

Screw connection, low profile version

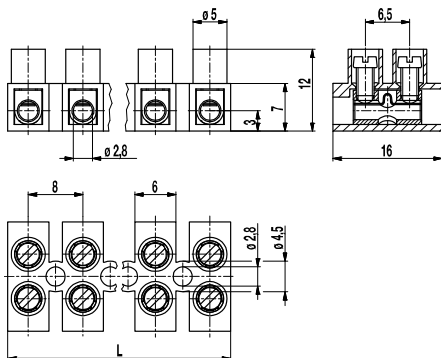

The types of series of 302 are our smallest screw terminal strips, the version 302-N have additionally a 3 mm lower total height. They are specially useful where space is at premium and the creepage distance metal part to ground has not priority, e.g. inside plastic casings.

Part Numbers

No. of poles	302-N	302-N-HDS	Length	Pcs
1	11.820.043	31.820.043	7,00	5000
2	12.820.043	32.820.043	15,00	2000
3	13.820.043	33.820.043	23,00	2000
4	14.820.043	34.820.043	31,00	1000
5	15.820.043	35.820.043	39,00	1000
6	16.820.043	36.820.043	47,00	100
7	17.820.043	37.820.043	55,00	70
8	18.820.043	38.820.043	63,00	70
9	19.820.043	39.820.043	71,00	60
10	20.820.043	40.820.043	79,00	50
11	21.820.043	41.820.043	87,00	50
12	22.820.043	42.820.043	94,00	50

further number of poles on request

Part numbers: "no flame" acc. to glow-wire test

No. of poles	302-N	302-N-HDS	Length	Pcs
2	12.820.044.EN6	32.820.044.EN6	15,00	2000
4	14.820.044.EN6	34.820.044.EN6	31,00	1000
5	15.820.044.EN6		39,00	1000
12	22.820.044.EN6	42.820.044.EN6	94,00	50

further number of poles on request

General Information

Pitch	8 mm
No. of poles	1 - 12
Areas of application	For household, lighting and similar electrical appliances.

Technical Data

Clamping Range	<i>solid / flexible / AWG</i>		
<i>without wire protector</i>	0,5 - 4 mm ² / 0,5 - 2,5 mm ² / 20 - 12 AWG		
<i>with wire protector</i>	0,34 - 2,5 mm ² / 0,34 - 2,5 mm ² / 22 - 14 AWG		
Rated Cross Section	1,5 mm ²		
Wire Stripping Length	5 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	250 V	320 V	320 V
Rated Impulse Voltage	4 kV	4 kV	4 kV
Rated Insulation Voltage	250 V acc. to EN 60998-1		
Rated Current	17,5 A		
Torque	0,4 Nm		

Material

Moulding	PA, natural, V-2 (PA, natural, V-0) details in brackets for "no flame" products
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 80°C
Terminal Body	Nickel plated brass
Screw	M2,6; zinc plated steel, blue passivated
Wire protector	Stainless steel strip

Approvals

	Current	Voltage	Group	AWG	Nm
	10	300	B,D	20 - 12	0,4
	20	300	B	26 - 12	0,4
	20	300	B	26 - 14	0,4 [1]
	Current	Voltage	mm ²		
	17,5	250	1,5		

[1] for 302-N-HDS

Options / Accessories

- Marking options on the screw guides
- Marking strips BST-302
- Jumper 302-J
- Moulding made of special polyamide for e.g. household appliances
- Screws made out of brass
- Up to 26 poles possible
- Socket with blind hole