
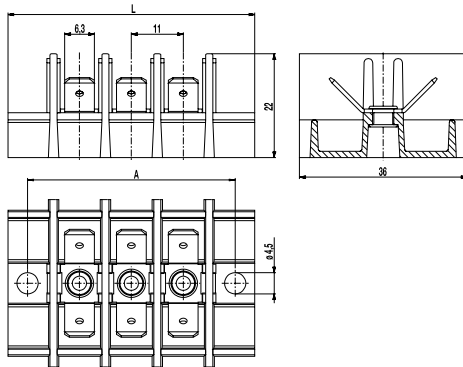


307-PC-/PCM

Tab/screw connector blocks
Star-shaped tab arrangement



$L = (\text{number of poles} \times \text{pitch}) + 19,3$

$A = (\text{number of poles} + 1) \times \text{pitch}$

Types of connection shown with package 3.077

A combination of straight and angular tabs and straight screw connections, these connector blocks are particularly suitable for the mains connection of electrical equipment. They are available in various sizes, pole numbers and types for individual applications. Depending on the application requirements, they are available in different number of poles and variants.

The tabs are suitable for receptacles to DIN 46247 and assembled in packets containing multiple ports (maximum of 6 ports per pole) with a metal rivet which results in low contact resistance.

Due to the variable and extensive assembly combinations of the poles, a high packing density is achieved.

At the end of the connectors a fixing hole is provided. Flexible conductors may only be used with core cable ends and cable lugs.

At a mixed assembly, we ask for a sketch according to order illustration (please see next page), especially for the orientation of asymmetric packets. Due to the variety of designs, a total list of part numbers is not possible.

Note concerning the variants:

...PC: single level

...PCM: multi level

General Information

Pitch	11 mm
No. of poles	2 - 21




Technical Data

Clamping Range	<i>solid / flexible / AWG</i>		
	0,75-4 mm ² / 0,75-2,5 mm ² / 18-12 AWG [1] 0,5-1,5 mm ² / 0,5-1,5 mm ² / 20-16 AWG [2]		
Rated Cross Section	4 mm ² [1] / 1,5 mm ² [2]		
Wire Stripping Length	8 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	200 V	320 V	500 V
Rated Impulse Voltage	4 kV	4 kV	4 kV
Rated Insulation Voltage	250 V acc. to EN 60998-1 [3]		
Rated Current	7,5 A with receptacle 2,8; wire 1 mm ² (16 AWG) 15 A with receptacle 4,8; wire 2,5 mm ² (14 AWG) 20 A with receptacle 6,3; wire 6 mm ² (10 AWG) Screw connection: depending on tab versions		
Torque	1,2 Nm		
Other specifications	Screw terminals are generally suitable for wires with identical wire type / cross-section.		

Material

Moulding	PC, black, V-0
Comparative Tracking Index	CTI 225
Temperature Range	-40°C up to 125°C
Tab	Nickel plated brass
Screw	M4; zinc plated steel, blue passivated
Tubular rivet	Tin plated copper

Approvals

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	25	300	B	max. 10	[4][7][8]
	15	300	B	max. 14	[5][7][8]
	6	300	B	max. 16	[6][7][8]
	25	300	B	max. 10	[4]
	15	300	B	max. 10	[5]
					

Options / Accessories

- Marking strips BST-307
- Jumpers 307-V, 307-VS
- Moulding made of polyamid

[1] Screw connection

[2] SAK version

[3] for use with insulation receptacles 450 V

[4] for use with insulation receptacles 6,3

[5] for use with insulation receptacles 4,8

[6] for use with insulation receptacles 2,8


[7] for factory wiring only

[8] Group C: 150 V


307-PC/-PCM

Tab/screw connector blocks
Assembly layout and order information

Assembly layout

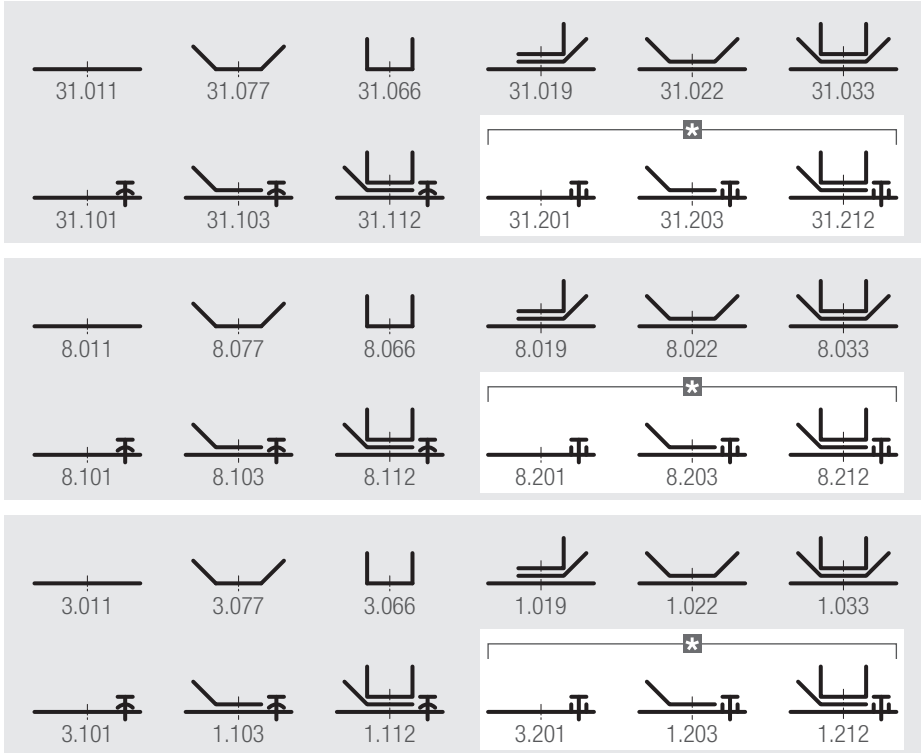

Tab size

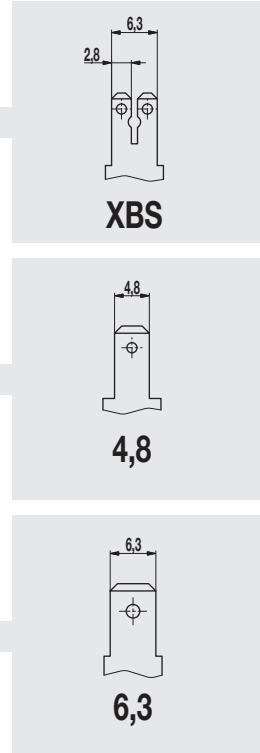

⊠ This type of assembly (SAK-variants) features laterally raised edges preventing false insertion of wires with small cross-sections.

Assembly layout
Please enter here the desired assembly type number.


If you order various sizes, please enclose drawing and enter here: **MIX**

Poles
02
up to
21

307-PCM/ [] - []

one-tier tab connector (.011, .077, .066, .101, .201) only as „PC“

Example ordering scheme for mixed assembly (“MIX”)

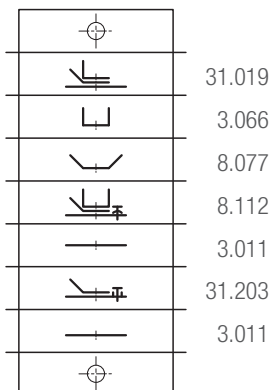

When inquiring or ordering products for uniform assembly, stating the above designation is sufficient.

For mixed assembly (“MIX” as part of the type designation), we additionally need a drawing according to the example on the left.

The drawing must state the desired number of poles, the assembly of each pole and the assembly number.