
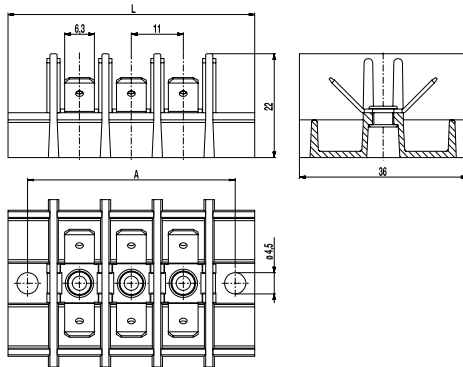


307-PC-/PCM

Tab/screw connector blocks
Star-shaped tab arrangement



$L = (\text{number of poles} \times \text{pitch}) + 19,3$

$A = (\text{number of poles} + 1) \times \text{pitch}$

Types of connection shown with package 3.077

A combination of straight and angular tabs and straight screw connections, these connector blocks are particularly suitable for the mains connection of electrical equipment. They are available in various sizes, pole numbers and types for individual applications. Depending on the application requirements, they are available in different number of poles and variants.

The tabs are suitable for receptacles to DIN 46247 and assembled in packets containing multiple ports (maximum of 6 ports per pole) with a metal rivet which results in low contact resistance.

Due to the variable and extensive assembly combinations of the poles, a high packing density is achieved.

At the end of the connectors a fixing hole is provided. Flexible conductors may only be used with core cable ends and cable lugs.

At a mixed assembly, we ask for a sketch according to order illustration (please see next page), especially for the orientation of asymmetric packets. Due to the variety of designs, a total list of part numbers is not possible.

Note concerning the variants:

...PC: single level

...PCM: multi level

General Information

Pitch 11 mm

No. of poles 2 - 21

Technical Data

Clamping Range *solid / flexible / AWG*

0,75-4 mm² / 0,75-2,5 mm² / 18-12 AWG [1]
0,5-1,5 mm² / 0,5-1,5 mm² / 20-16 AWG [2]

Rated Cross Section 4 mm² [1] / 1,5 mm² [2]

Wire Stripping Length 8 mm ± 0,5 mm

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	200 V	320 V	500 V
Rated Impulse Voltage	4 kV	4 kV	4 kV

Rated Insulation Voltage 250 V acc. to EN 60998-1 [3]

Rated Current 7,5 A with receptacle 2,8; wire 1 mm² (16 AWG)
15 A with receptacle 4,8; wire 2,5 mm² (14 AWG)
20 A with receptacle 6,3; wire 6 mm² (10 AWG)

Torque 1,2 Nm

Other specifications Screw terminals are generally suitable for wires with identical wire type / cross-section.

Material

Moulding PC, black, V-0

Comparative Tracking Index CTI 225



Temperature Range -40°C up to 125°C


Tab Nickel plated brass

Screw M4; zinc plated steel, blue passivated

Tubular rivet Tin plated copper

Approvals

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	25	300	B	max. 10	[4][7][8]
	15	300	B	max. 14	[5][7][8]
	6	300	B	max. 16	[6][7][8]
	25	300	B	max. 10	[4]
	15	300	B	max. 10	[5]

	Current [A]	Voltage [V]	[mm ²]
			[9]

Options / Accessories

- Marking strips BST-307
- Jumpers 307-V, 307-VS
- Moulding made of polyamid

[1] Screw connection

[2] SAK version

[3] for use with insulation receptacles 450 V

[4] for use with insulation receptacles 6,3

[5] for use with insulation receptacles 4,8

[6] for use with insulation receptacles 2,8

[7] for factory wiring only

[8] Group C: 150 V

[9] except XBS version

