
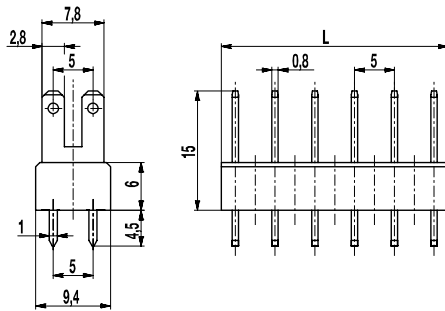


900-SH-5

Tab connector
Tab 2x 2,8 mm



The tab connector 900-SH-5 with double solder termination and a pitch of 5 mm is designed for 2x 2,8 mm tab connector receptacles.

Depending on the respective application, the tab connectors of series 900 allow to plug in bare, partially or fully insulated tab receptacles according to DIN 46247. On tab connectors of this series, two non-insulated 2,8 mm tab receptacles can be plugged in parallel. Insulation receptacles ISO-110 (see also ISO product data sheet) can be used to insulate 2,8 mm tab receptacles.

Part Numbers

No. of poles	900-SH-5	Length	PU
2	35.870.902	8,50	250
3	35.870.903	13,50	250
4	35.870.904	18,50	200
5	35.870.905	23,50	100
6	35.870.906	28,50	100
7	35.870.907	33,50	100
8	35.870.908	38,50	100
9	35.870.909	43,50	100
10	35.870.910	48,50	100
11	35.870.911	53,50	100
12	35.870.912	58,50	100
13	35.870.913	63,50	100
14	35.870.914	68,50	100
15	35.870.915	73,50	100
16	35.870.916	78,50	100
17	35.870.917	83,50	100
18	35.870.918	88,50	100
19	35.870.919	93,50	100
20	35.870.920	98,50	100
21	35.870.921	103,50	100
22	35.870.922	108,50	100
23	35.870.923	113,50	100
24	35.870.924	118,50	50
25	35.870.925	123,50	50

further number of poles on request

General Information

Pitch	5 mm
No. of poles	2 - 25



Technical Data

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	320 V	320 V	630 V
Rated Impulse Voltage	4 kV	4 kV	4 kV
Rated Insulation Voltage	450 V acc. to EN 60998-1		
Rated Current	7,5 A: with receptacles 2,8; wire 1 mm ² (16 AWG)		
Hole in PCB	ø 1,6 mm		
Other specifications	Indicated rated voltages refer to applications with insulation receptacles		

Material

Moulding	PA, red, V-0
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Solder pin	1,0 x 0,8 mm; tin plated brass
Tab	2,8 x 0,8 mm; tin plated brass

Approvals

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	15	150	B		
	15	300	B		
	10	300	D, E		

Options / Accessories

- Consecutive numbering
- Special marking according to drawing
- Self-adhesive marking strip BST-5,00
- Insulation receptacles ISO
- Change of pitch
- Component mix of tab connector versions
- Tab connectors are also individually available (see single tabs GST-900)