
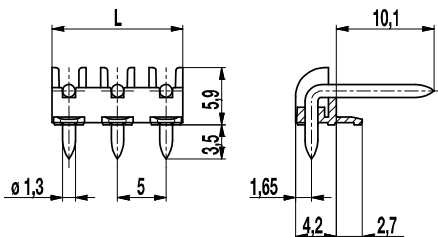


Pin Strip 950-SLS

Plug-in direction parallel to PCB



Part Numbers

No. of poles	950-SLS	Length	Pcs
2	12.893.101	8,50	1000
3	13.893.101	13,50	500
4	14.893.101	18,50	250
5	15.893.101	23,50	250
6	16.893.101	28,50	250
7	17.893.101	33,50	250
8	18.893.101	38,50	100
9	19.893.101	43,50	100
10	20.893.101	48,50	100
11	21.893.101	53,50	100
12	22.893.101	58,50	100
13	23.893.101	63,50	100
14	24.893.101	68,50	100
15	25.893.101	73,50	100
16	26.893.101	78,50	100
17	27.893.101	83,50	100
18	28.893.101	88,50	100
19	29.893.101	93,50	100
20	30.893.101	98,50	100
21	31.893.101	103,50	100
22	32.893.101	108,50	100
23	33.893.101	113,50	100
24	34.893.101	118,50	100

General Information

Pitch	5 mm
No. of poles	2 - 24



Technical Data

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	250 V	320 V	500 V
Rated Impulse Voltage	4 kV	4 kV	4 kV
Rated Insulation Voltage	250 V acc. to EN 60998-1		
Rated Current	6 A		
Hole in PCB	ø 1,6 mm		

Material

Moulding	PA, grey, V-0
Comparative Tracking Index	CTI 400
Insulating Group	II
Temperature Range	-40°C up to 100°C
Solder pin	ø 1,3 mm; tin plated brass

Approvals

	Current	Voltage	Group	AWG	Nm
	10	300	B		
	10	300	B		

Options / Accessories

- Pitch of 10 mm for larger clearance and creepage distances
- Other pin lengths on request
- Other pin surfaces on request