
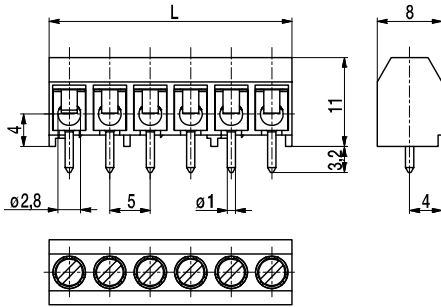



PCB Connector Series 95 for THR

950-THR(-DS)

Screw connection



PCB Layout



Solder paste thickness: 0,15 - 0,2 mm
Solder pad diameter: \varnothing 2,2 mm

The products based on our established 950 series have been designed for the soldering process in Through-Hole-Reflow technology.

The soldering paste is applied to the plated through holes and the pins are placed in the circuit board and soldered by a reflow oven.

The terminal mouldings are made of heat-resistant material. The stand-offs on the base ensures there is enough room for the soldering paste and facilitates good heat circulation for optimum soldering and enables the soldering joint to be visually inspected.

The solder pin projects very slightly with a circuit board thickness of 1,6 mm and creates a solder point on both sides and thus guarantees a secure mounting. The position of the solder pins enables an equally minimal allocation area on the circuit board as with wave soldering.

This PCB terminal is for a conductor cross sections of 1,5 mm² in 5 mm pitch and available in 2 to 12 pole lengths, with or without wire protector as well as a version with enlarged clamping size (958-THR).

Articlenumbers

No. of poles	950-THR	950-THR-DS	Length	Pcs
2	10.879.102	20.879.102	10,00	250
3	10.879.103	20.879.103	15,00	250
4	10.879.104	20.879.104	20,00	100
5	10.879.105	20.879.105	25,00	100
6	10.879.106	20.879.106	30,00	100
7	10.879.107	20.879.107	35,00	100
8	10.879.108	20.879.108	40,00	100
9	10.879.109	20.879.109	45,00	100
10	10.879.110	20.879.110	50,00	100
11	10.879.111	20.879.111	55,00	100
12	10.879.112	20.879.112	60,00	100

General Information

Centre to centre spacing	5 mm
No. of poles	2 - 12
Accessories	Self-adhesive marking strip BST-5,0

Technical Data

Clamping Range	solid / flexible / AWG		
without wire protector	0,75 - 4 mm ² / 0,75 - 2,5 mm ² / 18 - 12 AWG		
with wire protector	0,34 - 2,5 mm ² / 0,34 - 2,5 mm ² / 22 - 14 AWG		
Rated Cross Section	1,5 mm ²		
Wire Stripping Length	6 mm \pm 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	160 V	160 V	320 V
Rated Impulse Voltage	2,5 kV	2,5 kV	2,5 kV
Rated Insulation Voltage	130 V acc. to EN 60998-1		
Rated Current	17,5 A		
Soldering process	Wave solder & reflow solder		
Hole in PCB	\varnothing 1,3 mm		
Torque	0,4 Nm		
PCB thickness	Wave solder max. 1,6 mm; reflow solder 1,6 mm - 3,2 mm		

Material

Moulding	PA HT, black, V-0
Comparative Tracking Index	CTI \geq 600
Insulating Group	I
Temperature Range	-40°C up to 150°C; reflow solder temperature (Peak) max. 260°C (15-30 s)
Terminal Body	Tin plated brass
Screw	M2,6; zinc plated steel, blue passivated
Solder pin	\varnothing 1 mm; tin plated brass
Wire protector	Tin bronze

Approvals

	Current	Voltage	Group	AWG	Nm
	15	300	B	26 - 14	0,4
	15	300	B	26 - 14	0,4

Options / Accessories

- Consecutive numbering
- Special marking accord. drawing
- Self-adhesive marking strip
- Other pin length on request

Articlenumbers: Tape-on-Reel

No. of poles	950-THR	950-THR-DS	Tape Width	Tape Height	Pcs
6		20.879.106.A00	56 mm	15,7 mm	300

further number of poles on request