


Pin strip 971-FBWP

Plug-in area \varnothing 1,3 mm, with locking plate

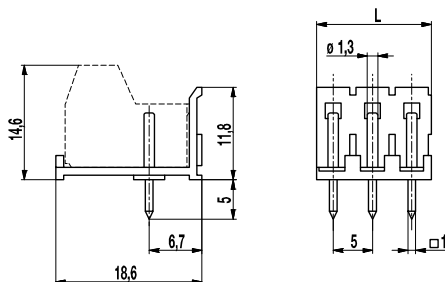

Part Numbers

No. of poles	971-FBWP	Length	Pcs
2	32.893.412	10,00	200
3	33.893.412	15,00	200
4	34.893.412	20,00	100
5	35.893.412	25,00	100
6	36.893.412	30,00	100
7	37.893.412	35,00	100
8	38.893.412	40,00	100
9	39.893.412	45,00	50
10	40.893.412	50,00	50
11	41.893.412	55,00	50
12	42.893.412	60,00	50

General Information

Pitch	5 mm
No. of poles	2 - 12
Usable with	plug connector 970-NFBW

Technical Data

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	160 V	160 V	320 V
Rated Impulse Voltage	2,5 kV	2,5 kV	2,5 kV
Rated Insulation Voltage	130 V acc. to EN 60998-1		
Rated Current	6 A		
Hole in PCB	\varnothing 1,6 mm		

Material

Moulding	PA, grey, V-0
Comparative Tracking Index	CTI \geq 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Solder pin	\varnothing 1,3 mm (plug-in area) / 1,0 x 1,0 mm (soldering area); tin plated brass

Approvals

	Current	Voltage	Group	AWG	Nm
UL®	20	300	B		
	10	300	D		
SP®	20	300	B		
	10	300	D, E		

Options / Accessories

- Pitch of 10 mm for larger clearance and creepage distances