


Ex-Protected Mantle Terminals DFG-AX

DFG-1-AX / DFG-2-AX / DFG-3-AX / DFG-5-AX

with threaded stem; Ex e II, Explosion-Proof

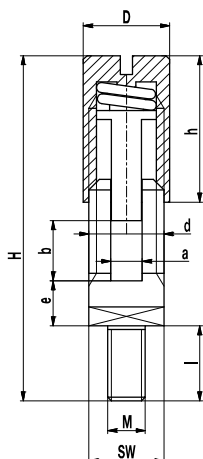

Dimensions (mm)

Type	mm ² (AWG)	a x b	D	d	H/h	l	e	M	SW
DFG-1-AX	2x2,5 (2x13)	3,1x5,4	8	M7x0,75	32/12,5	8	5	M4	8 (4kt.)
DFG-2-AX	2x4 (2x11)	3,5x6,5	10	M8,5x1	38/16,5	8	5	M4	10 (4kt.)
DFG-3-AX	2x6 (2x9)	4,2x8,5	11,5	M10x1	46/19,5	10	6	M5	10 (4kt.)
DFG-5-AX	2x16 (2x5)	7,5x16	16	M14x1,25	69,5/30,5	12	7	M6	14 (6kt.)

Our explosion and firedamp-proof mantle terminals, millions of which have already proved their worth in practical applications, are suitable for installation in apparatus, machinery and installation equipment of all types. They are mainly used in applications requiring a locked screw connection. WECO mantle terminals provide maximum operational reliability and meet the requirements of the corresponding VDE regulations.

The upper section of a DF terminal comprises a mantle nut, a flat clamping member which is mounted so that it can rotate and a spiral spring (in case of 4 mm² terminals a lock washer 3,5 DIN 7980 is used instead of a spring, these upper sections are called DR). The spring with extra-long spring travel is mounted captively on the inside of the upper section between the collar of the clamping member and the mantle nut. The latheturned journal above the plate-shaped collar is slightly longer than the block length of the spring so that it absorbs most of the pressure and the spring is thus not subject to fatigue. The fitted spiral spring produces a strong blocking effect (friction locking) and exerts a long-term, reliable pressure on the clamped conductors. The upper section encloses the lower section and thus prevents the lateral parts from bending outwards.

Part Numbers

Type	Part Numbers	Pcs
DFG-1-AX	82.201.227	250
DFG-2-AX	82.201.321	200
DFG-3-AX	82.201.410	100
DFG-5-AX	82.201.503	100

General Information

Additional Information

Notes on Installation:

The terminals can be used at ambient temperatures up to 40°C at the place of installation due to self-heating in apparatus under service conditions - primarily as earth terminals and for equipotential bonding - for the temperature classes T1 to T6. For use as live terminals in conjunction with insulating parts, a partial certificate for the entire electrical apparatus is necessary. For installation in a terminal housing - minimum degree of protection IP 54 - the requirements of EN 60079, must additionally be complied with. In addition, the terminals must be locked against rotation. This is easily possible using the square or hexagon foot.

Technical Data

Rated Current	max. load at 40°C/ 104°F ambient temperature	DFG-1: 30A DFG-3: 39A DFG-5: 53A DFG-6: 95A
---------------	--	--

Material

Pressure bolt	Nickel plated brass
Spring washer	(DFG-2-AX): zinc plated steel
Nut	Nickel plated brass
Slotted Bolt	Nickel plated brass
Spiral spring	(DFG-1-AX, DFG-3-AX, DFG-5-AX): spring steel, blue annealed

Approvals

PTB 03 ATEX N059-2

Approved according European Standard DIN EN 60079